



Pushing Performance

HARTING Component Range





Turning customer wish lists into concrete solutions

The **HARTING** Technology Group, which has its corporate headquarters in Espelkamp, Germany, develops tailored electrical and electronic connector solutions and products for power distribution, data transmission and networking applications. Founded 1945 in Minden, **HARTING** currently has more than 3,300 employees worldwide. As the knowledge and information society continues to evolve, networking with customers, suppliers and technology/business partners plays an increasingly crucial role in the domestic and international marketplace. **HARTING** has subsidiaries in 36 countries, which are located in close proximity to the customer base and markets. A local presence gives **HARTING** the opportunity to keep its ear to the ground and react quickly as situations change and developments move forwards.

Our goal is top performance.

While connectors guarantee functionality, they are by no means mere accessories. They form a core element of today's optical and electrical connectivity and infrastructure technology, and support modular machine and system design in a wide range of user industries. Connector reliability makes a crucial contribution to the problem-free operation of production, telecommunications and medical systems and in a whole host of other applications as well. The ongoing development of our technologies protects customer investment and ensures long-term functionality.



Close proximity to the customer.


The increasing level of industrialization around the world creates expanding markets characterized by very diverse requirements. What they all have in common, however, is the attempt to achieve perfection, workflow efficiency and reliable technology. The **HARTING** team at our international subsidiaries takes on a partnership role in the customer relationship. These professionals offer consultancy during the initial product development phase to ensure that our customers have access to the best possible solutions for their products.

Our vision: Pushing Performance.

HARTING delivers components which work very well together. However, in order to give our customers the best possible solution, **HARTING** can go even further to become an integral part of the value-add process. Our goal is maximum benefit to the customer with no compromises.

Quality enhances reliability and creates confidence.

The **HARTING** brand stands for exceptional quality around the world. This high standard of performance is the result of focused, non-compromising quality management that is certified and audited on a regular basis for compliance to EN ISO 9001, EMAS and ISO 14 001:2004. We take a proactive approach to new requirements, and **HARTING** ranks as the first rail equipment supplier to receive the new IRIS quality certificate.

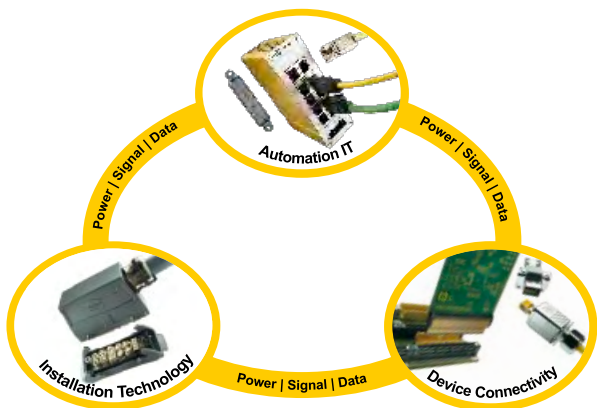

Connectivity & Networks

An intelligent and powerful connectivity technology forms the foundation of industrial application and manufacturing technology. Solutions from the **HARTING** triad – Installation Technology, Device Connectivity and Automation IT – generate clear benefits in applications.

The **HARTING** product and services spectrum covers electrical and electronic connectors, device connection technology and pre-assembled cable and network components. **HARTING** products supply facilities and machines with data, signals and energy. We provide solutions for application areas including automation, wind energy, solar energy, power generation and distribution, industrial network infrastructure, transportation, industrial devices, broadcast and entertainment, medical, embedded computing systems, machinery and telecom.

Installation Technology


Han® connectors are the worldwide connector standard in industry. **Han®** connectors impress with their rugged design, convenient handling and modularity of data, signal and power connections. Worldwide.

Automation IT

With its product series **Ha-VIS**, HARTING offers a consistent range of Ethernet network components and cabling products, which form the communication platform of convergent automation IT networks. Under **Ha-VIS** HARTING offers fully integrated RFID solutions.

Device Connectivity

HARTING's **har-** Device Connectivity technology is a universal and innovative product portfolio of board connector and connection technology for devices in the IP 20 to IP 65 / IP 67 protection categories.

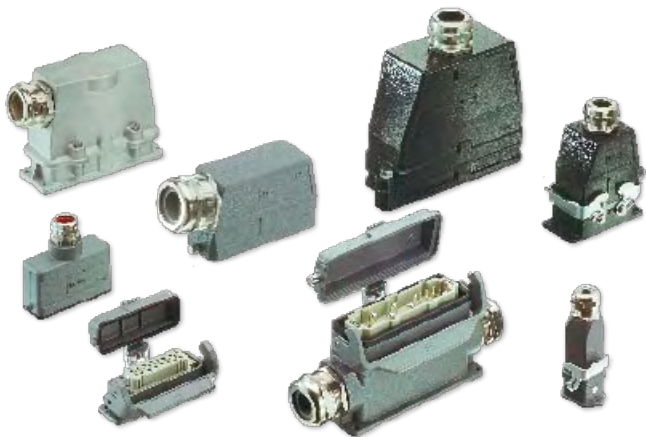

Industrial connectors Han®

HARTING industrial connectors are used in all kinds of harsh environmental conditions whenever an electrical connection is needed that is secure, robust and detachable. Our product line features contact inserts for sensitive signal transmission as well as modular contacts for power transmission up to 650 A. Our hoods and housings are available in protection degree IP 44 up to IP 69K. Almost every size is available in four different housing types.

Advantages:

- On-site installation of machines and facilities
- Replacement of production units possible when converting types
- Assembly and disassembly of production equipment possible after a change of location
- Replacement of movable connection cables is possible

Number of contacts:

1 up to 400-pole + PE

Rated voltage:

25 V up to 5000 V

Rated current:

5 A up to 650 A

Terminations:


- Screw terminal
 - Crimp terminal
 - HARAX® IDC terminal
 - Cage-clamp terminal
 - Axial screw terminal
 - Solder terminal
 - Wrap terminal
 - Han-Quick Lock® terminal
- Housing types: Han® Standard, Han® M, Han® HPR, Han® EMC
- Accessories: Covers, cable glands and PCB adapters
- Approvals: UL, CSA for inserts
Nema 4/12 for hoods and housings
CCC



International Railway Industry Standard



EN ISO 9001 and 14 001 certified

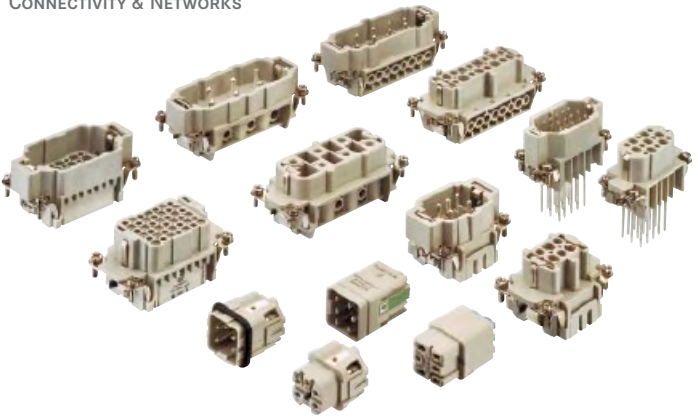

Standard inserts Han®

HARTING standard inserts are established main components of industrial connectors since several years. Product range includes a huge quantity of different inserts for sensitive signals up to energy transmission until 100 A. The inserts are related to defined housings depending on size and type of construction. To achieve various requests different types of terminations were developed.

Distinct features/
advantages :

- On-the-spot-installation of machines and plants
- Disassembly and reassembly of production lines when moved
- Quick exchange of cables (i.e. in case of cable break)
- Connection of test and diagnostic devices (i.e. on vehicles)
- Exchange of production units for a model change etc.

Numbers of contacts: 1 up to 400 poles + PE

Rated voltage: 25 V up to 690 V

Rated current: 5 A up to 100 A

Terminations: Screw terminal, Crimp terminal, HARAX® insulation displacement contact (IDC), Cage clamp terminal, Axial screw terminal, Solder terminal, Wrap terminal, Han-Quick Lock® terminal

Types: Han A®, Han D® / DD®, Han E® / Han® ES / ESS / EE / EEE, Han HvE® / ES, Han-Com®, Han® HsB, Staf®, Han® Q

Accessories: PE-multiplier, docking frames, coding pins

Approvals: UL, CSA for inserts
CCC



International Railway Industry Standard



EN ISO 9001 and 14 001 certified



High Current connectors Han® HC

HARTING High Current connectors offer possibilities for power transmission in the range from 200 A up to 650 A. The inserts will be used together with Han® HPR hoods and housings which lead to guaranteed characteristics like robustness, protection against water pressure and vibration resistance. The high current contacts are available in crimp- and axial screw termination. Thus they are the solution of choice for traction and auxiliary converters, brakes, door and air-conditioning subsystems.

Distinct features/

advantages :

- Safe current transmission due to capacious contact mass
- On-the-spot-installation of machines and components
- Fast exchange of application units in case of over-haul

Numbers of contacts: 1 – 10 poles

Rated voltage: 2000 V up to 4000 V

Rated current: 200 A up to 650 A

Series: Han® K3/0, K3/2
Han® HC Modular 350
Han® HC Modular 650

Terminations: Screw terminal
Crimp terminal
Axial screw terminal

Accessories: Protection covers, cable glands/clamps,
Crimping tools

Approvals: UL, CSA for inserts
Nema 4/12 for hoods and housings
CCC



International Railway Industry Standard

EN ISO 9001 and 14 001 certified



Han-Modular®

The Han-Modular® series is a system of inserts designed to meet the specific requirements of individual customers. In close cooperation with potential users a range of modular inserts has been developed allowing the simple assembly of custom designed connector sets which meet the diverse requirements encountered by designers today.

Advantages:	Custom designs can be simply assembled Optimum solutions can be reached Stock can be minimized
Modules:	Standard modules for 16 A Power modules up to 200 A High density signal modules with up to 25 contacts High voltage modules up to 5000 V Shielded modules for Quintax or D-Sub inserts Data modules for USB, FireWire or RJ45 Modules for coaxial wires Optical modules for POF or glass fibre PneumatICAL modules for 3, 4 or 6 mm tubes
Numbers of contacts:	1 up to 300 pins
Rated voltage:	5 V up to 5000 V
Rated current:	4 A up to 200 A
Terminations:	Crimp terminal Cage clamp terminal Axial screw terminal Han-Quick Lock® terminal PCB solder terminal
Approvals:	UL for Modules Nema 4/12 for hoods and housings CCC



EN ISO 9001 and 14 001 certified



Han-Yellock®

Han-Yellock® is a new product series which retains the core functionality but differs significantly from current size and shape formats. The approach of this series makes many new functions possible, for example:

- An internal, latched locking mechanism on the hood
- Multiplies the potentials in the connector with Han-Yellock® modules
- Usage of Han-Modular® modules with adapter frames
- Front and rear assembly of inserts
- Protected Earth contact (PE) in crimp or Quick Lock termination

Thus, the Han-Yellock® offers improved functionality in the form of increased variability, multiplied potential, simplified handling, reduced incidence of errors and maximized safety.

Advantages:

- Less article numbers and less inventory, when planning for the electrical and mechanical layout
- Less wiring work within a machine, during the workflow
- Less steps in the workflow and quicker assembly, even during the after-sales stage
- Reduced down times because of the latched locking mechanism and maintenance-friendly design

Numbers of contacts:

1 up to 48 poles + PE

Possible use of different media and contact arrangements with Han-Modular®

Rated voltage:

500 V

Rated current:

20 A

Termination:

Crimp terminal, Han-Quick Lock® terminal

Size:

30 and 60

Accessories:

Coding pins, ground terminal

Approvals:

cUL



EN ISO 9001 and 14 001 certified



Han-Eco®

Han-Eco® – a new housing series made of thermoplastic material.

Han-Eco® is the ideal solution for applications that do not require the full range of product features offered by the Han® B series of housings, and users want to take advantage of the weight and cost advantages.

Like the Han® B standard series, the Han-Eco® series is available in the following sizes: 6 B, 10 B, 16 B and 24 B. Depending on size, versions of the bulkhead mounting and hood with straight or angled cable exit can be supplied.

Fast, simple assembly is another outstanding product feature. Click-and-mate design totally eliminates the need for tools during assembly of the Han-Eco® housing.

The Han-Eco® housing is compatible with nearly the full range of modules from the Han-Modular® series. One extra module fits into the Han-Eco® housing compared to the equivalent product in the Han® B Standard series. This special feature applies to all four sizes.

A optional PE module has been developed specifically for the Han-Eco® housing to hold the protective ground conductor.

Advantages:

- Weight reduction combined with mechanical strength
- Fast assembly process without tools
- Highly resistant to environmental stress, suitable for use in outdoor applications
- Nearly the complete range of modules from Han-Modular® series usable

Features

Material

- Hoods/Housings Polyamide, fibre-glass reinforced
- Locking element Polyamide, fibre-glass reinforced
- Hoods/Housings seal NBR
- Limiting temperatures -40 °C ... +125 °C
- Flammability acc. to UL 94 V 0
- Degree of protection acc. to DIN EN 60 529 for coupled connector IP 65



Components for switch cabinets, service interfaces and PCB adaptors

Connectors

Series: Han-Snap®

Series for connectors within closed electrical operating environments.

Frontpanel interfaces

for series: Han-Port®

Single- and double frames
for power and signals

Plug sockets
for European and international markets

Data inserts using standard interfaces


PCB Adaptor

Series: Han® Q
Han DD®
Han E®
Han-Modular®

Type: Han® Q 5/0
Han® Q 7/0
Han® Q 4/2
Han® Q 8/0
Han DD®
Han E®
Han DD® module
Han® Axial screw module



EN ISO 9001 and 14 001 certified

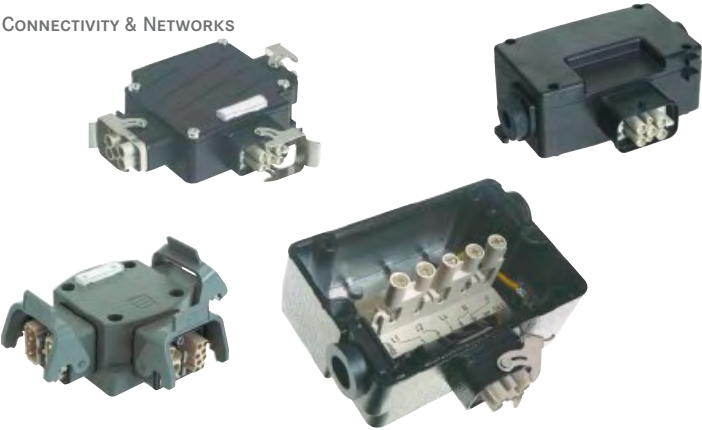

Components for energy transfer and distribution

Energy distribution

The Han-Power® series makes a fast, simple and comfortable installation of machines possible. The power cable is “tapped” with the Han-Power® S. For the fast and fault-free installation the industry connector is used with the Han-Power® T.


- Series:
- Han-Power®
- Types:
- Han-Power® S
plastic
metal
Han-Power® T
plastic with Han® Q 5/0
plastic with Han® Q 2/0
metal with Han® Q 4/2
Han-Power® T Modular Twin

Connectors

- Series:
- Han® Q
Han-Compact®
- Types:
- Han® Q 2/0
Han® Q 5/0
Han® Q 7/0
Han® Q 8/0
Han® Q 17
Han® Q 4/2

System cables

- Number of contacts:
- 2 – 17
- Rated voltage:
- max. 500 V
- Rated current:
- max. 40 A
- Fields of application:
- Transfer of power
- Approvals:
- UL, CSA
- 
- EN ISO 9001 and 14 001 certified

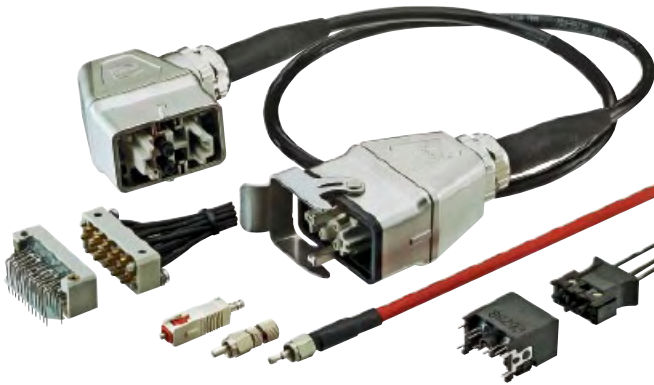

Fibre optic data link systems and components

Electro-optic

converters:	Solutions for optical wavelengths 660 nm, 850 nm and 1300 nm Optical transmitter and receiver for F-ST and F-SMA Special versions with up to 16 optical elements Optical transceivers for M12 connectors
Connectors:	Simplex and multipole connectors for glass and polymer optical fibres Quick assembly connectors for polymer optical fibres Contacts for glass and polymer optical fibres for use in Industrial Han® connectors Connectors up to IP 68
Cables:	For in- and outdoor applications Hybrid cables
Cable assemblies:	Cable assemblies with fibre optic and hybrid cables Customer specific harnesses
Accessories:	Tools for connector assembly and test equipment for service purposes



EN ISO 9001 and 14 001 certified



Value Added Business (VAB)

Worldwide implementation of customer specific applications. Wide range of services from specification to production. Electrical, mechanical design and engineering as well as concept development for power and data transmission for control units and systems.

Product groups

Power Cable Solutions (PCS)

Cable assemblies for power distribution

Applications with industrial connectors of the Han® product family

Data & Signal Solutions (DSS)

Cable assemblies for data and signal transmission

Ethernet, fibre optics and coaxial cable for customer specific requirements

Customer Specific Solutions (CSS)

System solutions for cabling, control units and cabinets

Customer specific engineering for cable harnesses, sub-systems and systems



EN ISO 9001 and 14 001 certified



Ha-VIS RFID system solutions

Ha-VIS RFID system solutions from HARTING provide transparency of data within applications like tracking & tracing, asset management, supply chain management and production planning.

For these applications HARTING has developed a complete and scalable product and solution portfolio of hard- and software with following characteristics:

- Integrated device and data management
- Embedded data base features
- Automated processing of occurrences
- Efficient analysis of transponder data
- Integrated programming interface for MS Windows Visual Studio
- Server for SQL data bases
- Capable with Win CE handhelds
- List and print generating tool
- RFID label designer
- Panel for administrators, web based
- Extension of Visual Studio

Ha-VIS RFID is the complete Ha-VIS RFID program for system integrators.



EN ISO 9001 and 14 001 certified



IP 30 Ethernet Switches

The Fast and Gigabit Ethernet Switches of the product families Ha-VIS eCon 2000, 3000, 9000, Ha-VIS sCon 3000, 9000 as well as Ha-VIS mCon 3000, 9000 are designed for industrial areas. The Ha-VIS eCon and Ha-VIS sCon Ethernet Switches operate as unmanaged Switch in Store and Forward Switching Mode and support Auto-crossing, Auto-negotiation and Auto-polarity. The Ha-VIS mCon Ethernet Switch operates as a managed switch and comes with comprehensive management functions. Real Time applications can be easily implemented with the innovative Fast Track Switching technology.

- | | |
|-------------|---|
| Advantages: | Metal housing |
| | Plug & Play Installation with Ha-VIS eCon & Ha-VIS sCon |
| | Ha-VIS mCon comes with SNMP and Web-Access |
| | RoHS compliant |

- | | |
|---------------------------|---|
| Ethernet Switches: | Data transfer rates of 10/100/1000 Mbit/s |
| | Ethernet conform to PROFINET and ODVA |
| | Ha-VIS sCon individually configurable via USB Interface |
| | F.O. ports are available in single mode or multi mode versions |
| | Ethernet Switches with an extended operational temperature range of -40 °C up to +70 °C are available |
| | Ha-VIS mCon supports two access methods for management: SNMP and a convenient Web-Access |



EN ISO 9001 and 14 001 certified



IP 40 / IP 65 / IP 67 Ethernet Switches


The Fast and Gigabit Ethernet Switches of the product families Ha-VIS eCon 4000, Ha-VIS eCon 7000, Ha-VIS mCon 4000 and Ha-VIS mCon 7000 are designed for direct deployment in industrial areas. Through their high degree of protection (IP 40 – IP 67), their industrial Ethernet interfaces (M12, Han® 3 A RJ45) and their robust metal housing, they are suitable for harsh industrial environments and for almost all mounting locations without a switch cabinet. The Ha-VIS eCon Ethernet Switches operate as unmanaged switches in Store and Forward Switching Mode and support Auto-crossing, Auto-negotiation and Auto-polarity. The Ha-VIS mCon Ethernet Switch operates as a managed switch and comes with comprehensive management functions.

- | | |
|-------------|---|
| Advantages: | <ul style="list-style-type: none"> Robust metal housing Reduced cabling costs in building industrial Ethernet networks Space saving, directly installable on machinery or in plant Plug & Play Installation RoHS compliant |
|-------------|---|

- | | |
|---------------------------|---|
| Ethernet Switches: | <ul style="list-style-type: none"> Fast Ethernet (Data transfer rates of 10/100 Mbit/s) Ethernet interfaces conform to PROFINET and ODVA High IP 65 / IP 67 degree of protection Extended operational temperature range and mechanical stability meet the highest demands Ha-VIS mCon supports two access methods for management: SNMP and a convenient Web-Access |
|---------------------------|---|



EN ISO 9001 and 14 001 certified

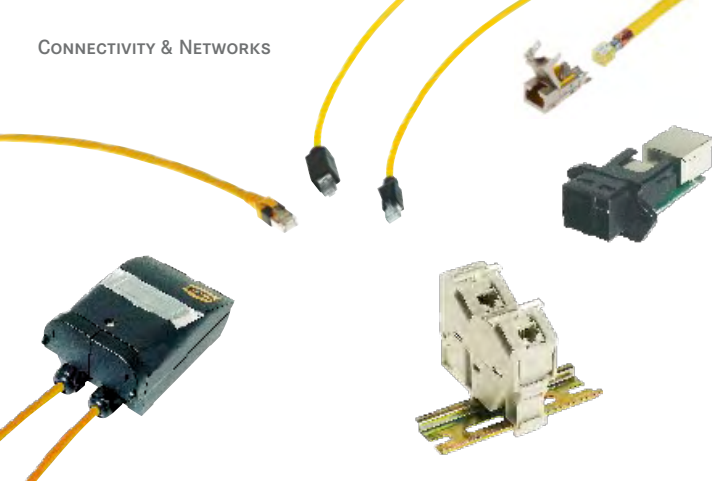

Cabling systems and components

Structured cabling (Generic cabling):

A complete range of cabling components for the installation of an application-independent passive infrastructure in industry, especially in automation. Universal 8-wire screened cabling for the seamless advancement of the IT infrastructure into harsh IP 65 / IP 67 environments and for outdoor areas.

Specification:

Network installation according to ISO/IEC 24 702 and EN 50 173-3 (Structured Cabling in Industrial Environments) – recommended for the transmission of data, voice/VoIP, video and other services – Ethernet transmission at 10 Mbit/s, 100 Mbit/s and 1000 Mbit/s (Gigabit Ethernet) – transmission characteristics Category 5 / Transmission Class D up to 100 MHz and Category 6 / Transmission Class E up to 250 MHz according to ISO/IEC 11 801:2002 incl. AMD1:2008 and EtherNET/IP according to IEC/TR 61158-1 (CPF number CP 2/2) and Category 5e according to EIA/TIA 568

Product range:

Consists of:

- Outlets and junctions boxes
- Panel feed-throughs
- Patch cables
- Connector sets for on-site cable assembly
- Cables for both fixed and flexible installation

Connector types:

- RJ45, IP 20
- HARTING PushPull RJ45, IP 67
- HARTING PushPull LC duplex, IP 67
- Han® 3 A RJ45, IP 67
- Ha-VIS preLink®

Installation:

Modular component range for free combination to meet special installation requirements. Patch cables and connecting cables are available both as quality inspected cable assemblies or as components sets for on-site assembly.

Benefits:


Real-time capable and future-proof cabling suitable for Gigabit Ethernet and beyond

In compliance with ISO/IEC 24 702 for signal transmission in all services in IT and automation environments guaranteeing compatibility with equipment and facilities.

Modular component range for cabling according to the specific customer requirements

Easy and quick assembly

The high quality of the cabling system guarantees long operation, reliability and protection in investment

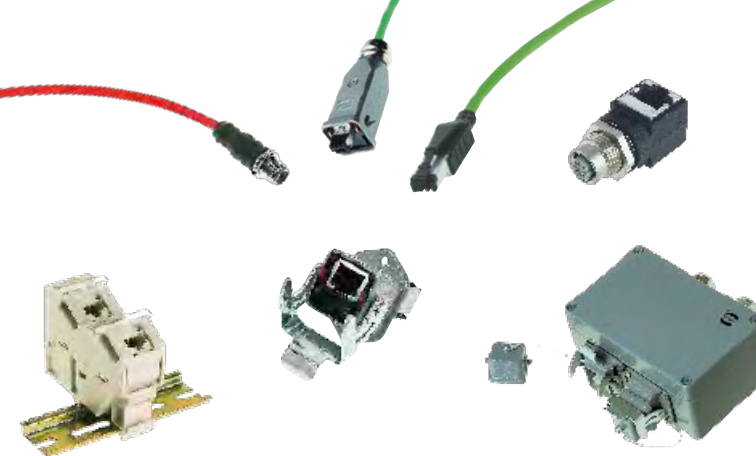

Cabling systems and components

Profile-specific cabling:

A complete range of cabling components for the installation of a profile-specific passive infrastructure in industry, especially in automation. Universal 4-wire screened cabling for the connection of automation solutions and control units in harsh IP 65 / IP 67 environments and for outdoor areas.

Specification:

Network installation according to ISO/IEC 61 918 and the guidelines of specific automation protocols (profiles) like:

- PROFINET according to IEC/TR 61 158-1, CPF3
- EtherCAT according to IEC/TR 61 158-1, CPF12
- Ethernet Powerlink according to IEC/TR 61 158-1, CPF13
- SERCOS III according to IEC/TR 61 158-1, CPF16

Suitable for the transmission of data via Ethernet – Ethernet transmission according to IEEE 802.3 at 10 Mbit/s and 100 Mbit/s – transmission characteristics Category 5/ Transmission Class D up to 100 MHz according to ISO/IEC 11 801:2002 and cat. 5e according to EIA/TIA 568

Product range:

Consists of:

- Outlets and junctions boxes
- Panel feed-throughs
- Patch cables
- Connector sets for on-site cable assembly
- Cables for both fixed and flexible installation

Connector types:


RJ45, IP 20
 Han® 3 A RJ45 and Hybrid, IP 67
 M12, IP 67
 Han® PushPull RJ45, IP 67
 Han® PushPull SCRJ, IP 67

Installation:

Modular component range for free combination to meet special installation requirements. Patch cables and connecting cables are available both as quality inspected cable assemblies or as components sets for on-site assembly.

Benefits:

In compliance with ISO/IEC 61 918 and with the guidelines of several user organisation groups like PNO, EtherCAT, EPSG, SERCOS
 Real-time capable, robust cabling suitable for Fast Ethernet
 Modular component range for cabling according to the specific customer requirements
 Easy and quick assembly
 The high quality of the cabling system guarantees long operation, reliability and protection in investment

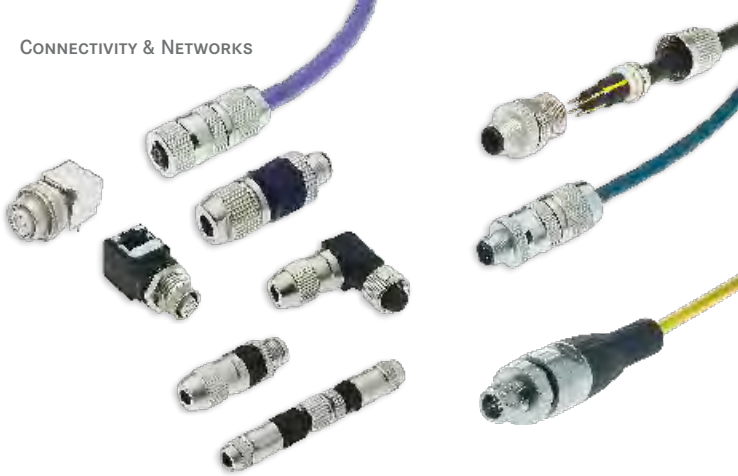

Circular connectors

Connectors with HARAX® termination technique

- Types:**
- Unshielded M8 connectors
 - Shielded and unshielded M12 connectors
 - 7/8" connectors
 - Shielded M12 panel feed throughs
- Advantages:**
- Compact and robust design
 - Quick and easy field assembly
 - No special tools required
 - Compatible with an extensive range of cables with different cross core sections and outer diameters

Connectors with crimp termination technique


- Types:**
- Shielded M12 connectors for data transmission and power supply
 - Shielded panel feed throughs M12 Crimp
- Advantages:**
- Compact and robust design
 - Vibration safe connection
 - Quick and easy field assembly with HARTING crimp tooling

M12 Connectors for high data rates – *har-speed* M12

- Types:**
- Straight and angled receptacles
 - M12 connectors
 - Overmoulded cordsets
- Advantages:**
- x-coding acc. to PAS 61 076-2-109
 - Performance class E_A
 - Component category 6_A
 - AWG 23-28
 - Robust and vibration safe



EN ISO 9001 and 14 001 certified

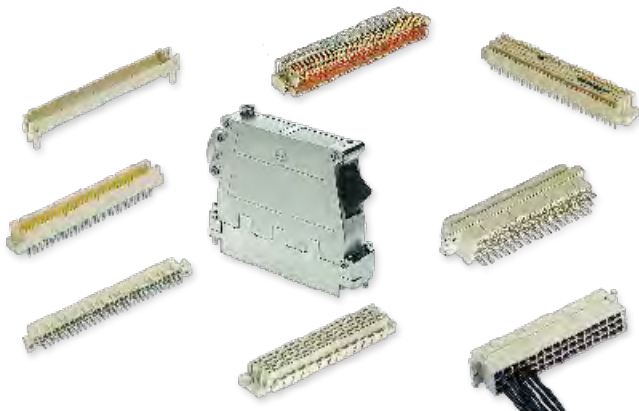

PCB connectors contact spacing 2.54 mm

Connectors

DIN 41 612

acc. to IEC 60 603-2

Types:

B, C, D, E, F, FM, H, MH, M, Q, R, R (HE 11), M inverse, short types 2B, 2C, 3B, 3C, 2F, F9, H3, 2Q, 2R, **har-bus® 64** for VME 64x (acc. to IEC 61 076-4-113) special variants for railway (NFF)

Number of contacts:

3 – 160

Working current:

1 – 15 A
max. 40 A (special contacts)

Terminations:

Straight and angled solder pins
Solder lugs
Press-in technology
SMC (Surface Mount Compatible) types
Crimp terminals
Wire wrap posts 0.6 x 0.6 and 1 x 1 mm
Insulation displacement terminals
Faston blades
Cage clamp terminals

Accessories:

Extensive range of hoods in plastic, metallized plastic or full metal
Fixing brackets and interfaces
Shrouds

Service:


Tooling for press-in and crimp termination
Concepts for SMC and press-in technology

Approvals:

UL, VDE, IEC, CECC, NFF



EN ISO 9001 and 14 001 certified

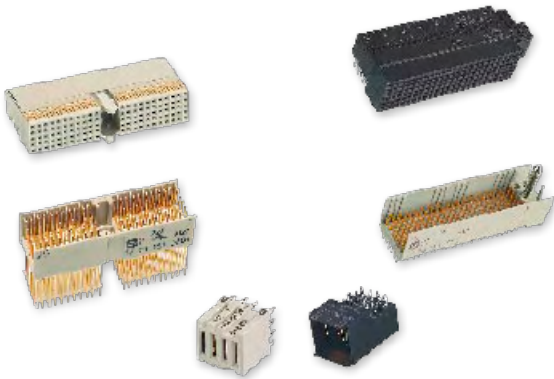

Metric connectors

har-bus® HM

with 5 resp. 8 rows

acc. to IEC 61 076-4-101, CompactPCI

Types: A, AB19, AB22, AB25, B19, B22, B25, C, D, DE, E, Monoblock 47 (A + B22)

Number of contacts: max. 220 signal contacts (308 fully shielded)

har-bus® HM 6 row

Extension of IEC 61 076-4-101
Modules with optional features such as guiding, coding and end wall
SMC types

Number of contacts: 72 or 144 signal contacts

har-bus® HM Power

Types: Straight female press-in modules
Angled male press-in and SMC modules
Lagging / leading contacts

Working current: max. 23 A at 70 °C

All connector families

- Accessories: Tooling for press-in termination
- Service: Shielding effectiveness measurements
Signal integrity analysis
Computer simulations (3D-FEM)
SPICE modelling
Concepts for SMC technique
- Approvals: UL, CSA, VDE, IEC, CECC



EN ISO 9001 and 14 001 certified



Mezzanine connectors

har-flex connectors

Variants:	Straight / angled (available Q4/2011) / IDC (available Q3/2011)
Advantages:	Optimized utilization of PCB real estate due to flexibility in choice of contact count Various stacking heights High contact density for reduced footprint Suitability for automated processing
Number of contacts:	6, 8, 10, ..., 96, 98, 100
Contact spacing:	1.27 mm x 1.27 mm
Rated current:	min. 0.8 A at 70 °C
Terminations:	SMT Insulation displacement termination for flat cables (AWG 30/1 or AWG 30/7)

MCE connectors


Advantages:	Very flexible stacking heights SMT compatible Data rates up to 14 Gbps Tape & reel packaging for high volume production
Number of contacts:	40 or 100
Contact spacing:	0.8 mm
Rated current:	1.7 A
Termination:	SMT

For both connector families

Service:	Concepts for SMT technique
Fields of application:	Industrial, telecommunications and medical



EN ISO 9001 and 14 001 certified

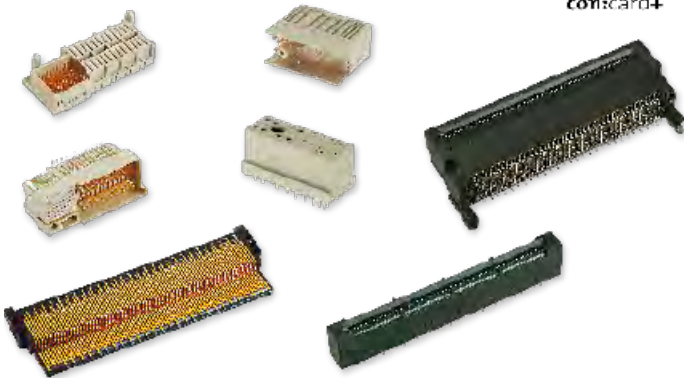

Connectors for AdvancedTCA® / MicroTCA™

AdvancedMC™ connectors

Types:	According to PICMG AMC.0 / MTCA.0 specification Right angled version for AdvancedTCA® and straight version for MicroTCA™. The card edge connectors are for direct mating with Advanced Mezzanine Cards (AdvancedMC™). With con:card+ features for enhanced contact reliability. Plug connector mounted on the AdvancedMC™ module replaces PCB gold pads.
Number of contacts:	170
Contact spacing:	0.75 mm
Termination:	Press-in technology, 0.55 mm PCB hole diameter, Pin-in-hole-reflow soldering for plug connector
Data rate:	Suitable for 12.5 Gbps applications



Power connectors


Types:	According to PICMG 3.0 / MTCA.0 specification Backplane and daughter card connectors for AdvancedTCA® Backplane and module connector for MicroTCA™ Mixed pin assignment of signal and power contacts
Number of contacts:	30 / 96
Working current:	16 A / 9.3 A @ 80% derating
Termination:	Press-in technology

All TCA connectors

Accessories:	Tooling for press-in termination
Design-in support:	Signal integrity analysis (S-parameter, TDR, eye-diagrams) Computer simulation and modelling (e.g. SPICE) Test boards and 3D models (STEP, IGES)



EN ISO 9001 and 14 001 certified

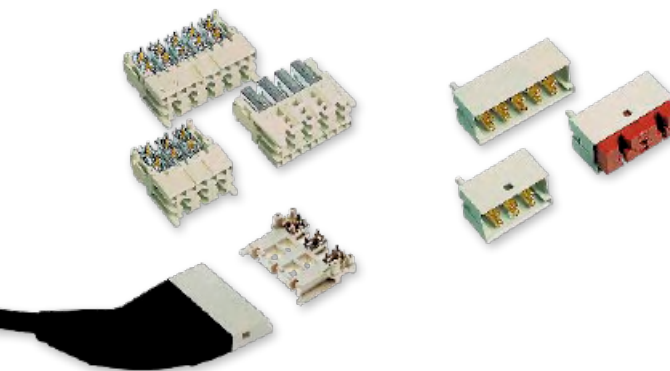

Mini Coax connector system

Mini Coax

Types:	1 SU, 1.25 SU, 1.5 SU (1 System Unit = 25 mm)
Number of contacts:	2, 4, 6, 8 and 10 (other loadings on request)
Frequency range:	0 – 2.5 GHz
Nominal impedance:	50 Ω
Termination:	Press-in technology

Mini Coax+


Frequency range:	0 – 4 GHz
Nominal impedance:	50 Ω
Termination:	SMT / SMC

All connectors

Accessories:	Tooling for press-in termination Pre-assembled cables Terminators
Service:	Shielding effectiveness measurements Signal integrity analysis Computer simulations (3D-FEM) SPICE modelling
Approvals:	UL, VDE, IEC, CECC




EN ISO 9001 and 14 001 certified

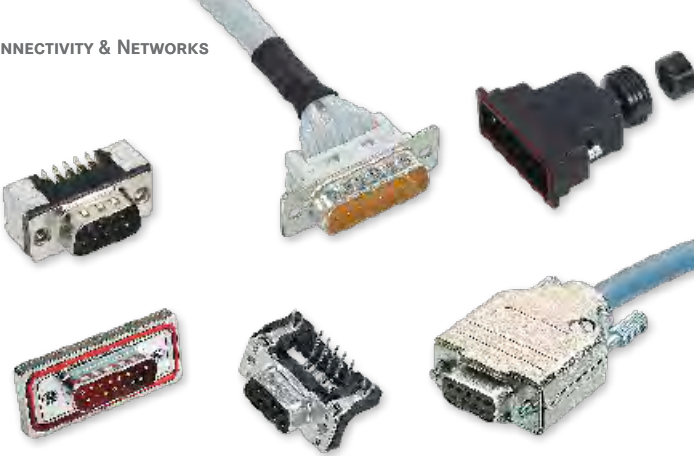

Standard, IP 67 D-sub connectors

D-Sub	acc. to CECC 75 301-802
Number of contacts:	9, 15, 25, 37, 50
Working current:	2 – 7.5 A
Fields of application:	Industrial electronics, office electronics, Information and telecommunication technology
Terminations:	Solder buckets Straight and angled solder pins European, US and low-profile footprint SMC (Surface Mount Compatible) types SMT (Surface Mount Technology) types Wire wrap terminals Crimp terminals Insulation displacement termination Press-in technology
Accessories:	Extensive range of hoods: plastic, metallized plastic, plastic with internal metal plate and full metal A large choice of locking systems
Approval:	UL
D-Sub IP 67	acc. to DIN 40 050, IEC 529
Number of contacts:	9, 15, 25, 37, 50
Working current:	5 A
Fields of application:	Any applications in the industrial, medical, machinery and transportation markets, which are to be protected from ingress
Terminations:	Rear panel mount straight and angled for PCB application Rear and front panel mount solder cup Solder cup for cable inside application in conjunction with IP 67 hood range
Accessories:	IP 67 plastic or metallized plastic hoods with a large range of screws
Approval:	UL
	EN ISO 9001 and 14 001 certified

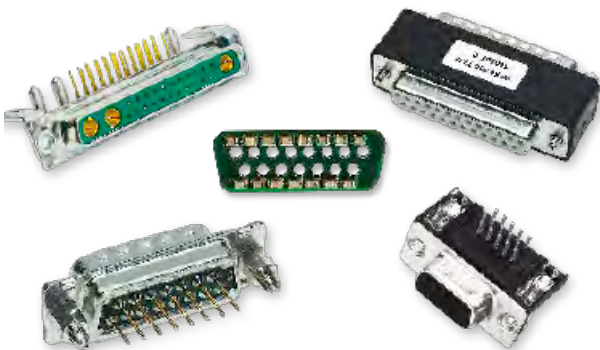

Mixed, high density, filter D-Sub connectors

D-Sub mixed

Variants:	acc. to DIN 41 652 T1 2W2, 2W2C, 3W3, 3W3C, 5W1, 5W5, 7W2, 7W7, 8W8, 9W4, 11W1, 13W3, 13W6, 17W2, 21W1, 21WA4, 24W7, 25W3, 27W2, 36W4, 43W2
Working current:	Signal 5 A; power up to 40 A
Terminations:	Solder cups Crimp terminals SMC (Surface Mount Compatible) types on request
Accessories:	Wide range of special contacts, like coaxial, power, high voltage and pneumatic contacts Special accessories like kits for blind mating

D-Sub high density

Number of contacts:	15, 26, 44, 62, 78
Working current:	up to 2 A
Terminations:	Straight and angled solder pins Solder cups Crimp terminals

D-Sub filter


Number of contacts:	9, 15, 25, 37
Working current:	up to 7.5 A
Terminations:	Solder buckets Straight and angled solder pins SMC (Surface Mount Compatible) types
Accessories:	Various integrated filters possible with 47 pF, 470 pF, 1000 pF and 3900 pF etc. All custom designs possible (based on a contact-by-contact approach) D-Sub filter with mixed contacts available on request

All connectors

Accessories:	Extensive range of hoods Tooling for crimp termination Special configurations on request
Fields of application:	Industrial, medical, telecom, computer and aerospace applications
Approval:	UL



EN ISO 9001 and 14 001 certified

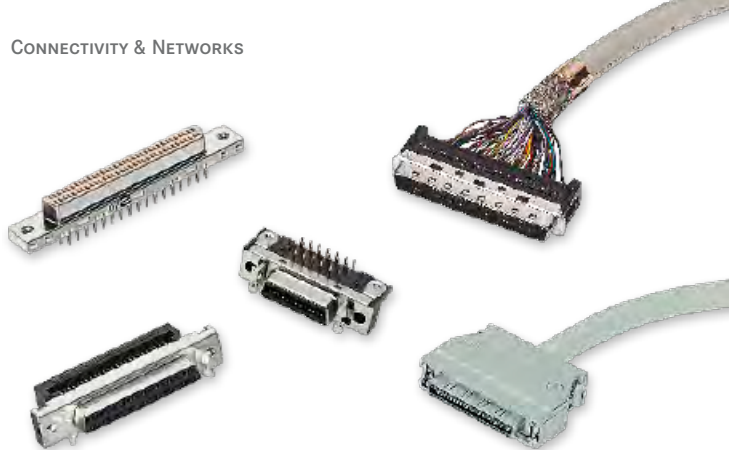

Micro electronic connectors

har-mik®

Miniature D connector contact spacing
1.27 mm acc. to:
SCSI 2 – SCSI 3, I.P.I.2, HI.P.P.I
EIA/TIA 232 E (RS 232 E), IEEE 1284
IEC 61 076-3-100 for bellows connectors
(with leaf contact design)
IEC 61 076-3-101 for pin and socket connectors
(with blade and fork contact design)

Number of contacts:

14 – 100

Working current:

1 A

Working voltage:

240 V ~

Fields of application:

Input/output interface for use in EDP, industrial and office electronics and telecommunication

Terminations:

Straight and right angled solder pins

IDC for discrete wires

IDC for flat cables

Press-in technology

SMC (Surface Mount Compatible) types

har-link®

Metric connector contact spacing 2.0 mm
acc. to IEC 61 076-4-107

Number of contacts:

10

Working current:

1.5 A

Fields of application:

Telecommunication

Automation

Professional broadcast

Transportation

Terminations:

IDC (for male connector)

Right angled solder pins (for female connector)



The **har-link®** connector system is a modular, compact and robust PCB-to-cable interface with excellent data transmission properties for high speed networking and telecommunication (up to 2 Gbit/s per twisted pair).


Both connector families

Approval:

UL



EN ISO 9001 and 14 001 certified

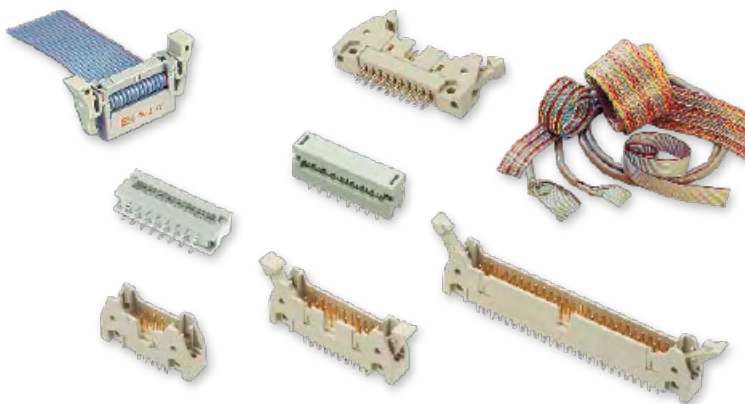

IDC connector systems for flat cables

Contact spacing 2.54 mm x 2.54 mm

SEK IDC connectors

Male and female connectors:

acc. to IEC 60 603-13, comply with MIL-C 83 503

Number of contacts:

6, 10, 14, 16, 20, 26, 30, 34, 40, 50, 60, 64

Working current:

1 A max.

Working voltage:

320 V

Terminations:

Female: IDC for flat cable

Male standard and low profile:

Straight and right angled solder pins

Press-in technology

SMC (Surface Mount Compatible) versions

Wire wrap posts

Accessories:

Strain relief, locking lever, board lock, vacuum cover for pick-and-place assembly

Packaging:

Card board box, tape on reel, tube

Approval:



Service:

Concepts for SMC and press-in technology

PCB transition connectors:

2-rows, 4-rows, DIP

Number of contacts:

2 rows:

6, 8, 10, 14, 16, 20, 24, 26, 30, 34, 40, 50, 60, 64

4 rows:

10, 16, 20, 26, 34, 40, 50

DIP :

14, 16, 24, 28, 40

Working current:

1 A max.

Terminations:

Cable side: IDC

PCB side: solder pins

Standard or kinked pin for 2-rows versions

Assembly:

2-rows: assembled lever

4-rows and DIP: separate cover



EN ISO 9001 and 14 001 certified



Compact IP 65 / IP 67 PushPull connectors for data, power and signal

PushPull connectors according to IEC 61 076-3-106 variant 4 and IEC 61 076-3-117 variant 14 for device connectivity

Fields of application: Factory and building automation
Automobile industry
PROFINET applications
Industrial electronics
Transportation
Lighting and display technology
Telecommunication and wireless networks

Ideal for compact devices in harsh environments or in outdoor applications

Locking mechanism: PushPull one-hand locking
Housing material: Plastic or metal
Accessories: Protective caps, cable assemblies, coding pins and tools
Protection class: IP 65 and IP 67

Data interface

Copper based: RJ45 acc. to IEC 60 603-7
Number of contacts: 4 or 8
Wire terminations: HARAX® IDC or piercing

Fibre based: LC duplex acc. to IEC 61 754-20 or
SCRJ acc. to IEC 61 754-24
LC duplex: singlemode or multimode GOF
SCRJ: POF, HCS, singlemode or multimode GOF

Hybrid interface

Number of contacts: 4 x data + 3 x power
Working current: 5 A
Working voltage: 32 V DC
Wire terminations: Crimp and solder terminals

Power interfaces

Number of contacts: 4 or 2 + PE or 4 + PE
Working current: 12 – 16 A
Working voltage: 48 V DC, 250 V AC or 400 / 690 V AC
Wire terminations: Crimp, solder or cage clamp terminals and Quick Lock



EN ISO 9001 and 14 001 certified



Outdoor solutions

HARTING's new range of products for outdoor solutions combines the advantages of the reliable HARTING PushPull technology and Han® 3 A housings with innovative inserts for fibre optic and copper.

The integration of the standard LC fibre optic connectors, in singlemode and multimode, meets the demands set by harsh outdoor environments. The hybrid variants combine data (LC fibre or RJ45) and power in one connector for easy installation and maintenance.

These high-quality, robust HARTING interfaces offer vibration protection and IP 65 / IP 67 as standard.

- | | |
|-------------|---|
| Advantages: | <ul style="list-style-type: none"> Standardized housings The smallest dimensions in IP 65 / IP 67 Up to four standardized LC fibre optic contacts Hybrid connectors for data & power Easy installation and maintenance Suitable for singlemode or multimode fibres Ready-to-use cable assemblies available |
|-------------|---|

- | | |
|----------------|--|
| Housing types: | <ul style="list-style-type: none"> HARTING PushPull Han® PushPull Han® 3 A Straight and angled Metal and plastic |
|----------------|--|

- | | | | | | | | |
|---------------|--|-------|-------------------------------------|-------|----------------------------|--------|-----------------------------------|
| Insert types: | <table border="0"> <tr> <td style="padding-right: 20px;">Power</td> <td>DC 48 V / 300 V
AC 230 V / 300 V</td> </tr> <tr> <td>Fibre</td> <td>LC duplex
2 x LC duplex</td> </tr> <tr> <td>Hybrid</td> <td>RJ45 & power
LC duplex & power</td> </tr> </table> | Power | DC 48 V / 300 V
AC 230 V / 300 V | Fibre | LC duplex
2 x LC duplex | Hybrid | RJ45 & power
LC duplex & power |
| Power | DC 48 V / 300 V
AC 230 V / 300 V | | | | | | |
| Fibre | LC duplex
2 x LC duplex | | | | | | |
| Hybrid | RJ45 & power
LC duplex & power | | | | | | |



EN ISO 9001 and 14 001 certified



I/O cable assemblies


System cables for applications in IP 20 and IP 67 environment

Based on the connector series D-Sub, D-Sub high density, **har-mik**[®] (SCSI), **har-link**[®], DIN 41612, Mini Coax and IDC connector systems for flat cables

Advantages:	No additional assembly
	Manufacturing of different lengths according to customer requirements
	Available as round and flat cables
	Ready-to-use and inspected products
Terminations:	Solder pins
	Crimp terminals
	Wire wrap termination
	Insulation displacement termination
	Strain relief and latching mechanism according to the connectors used
Types:	Variants with or without overmoulding technology depending on the application.
	The housings are available in plastic, metallized plastic or full metal.



EN ISO 9001 and 14 001 certified

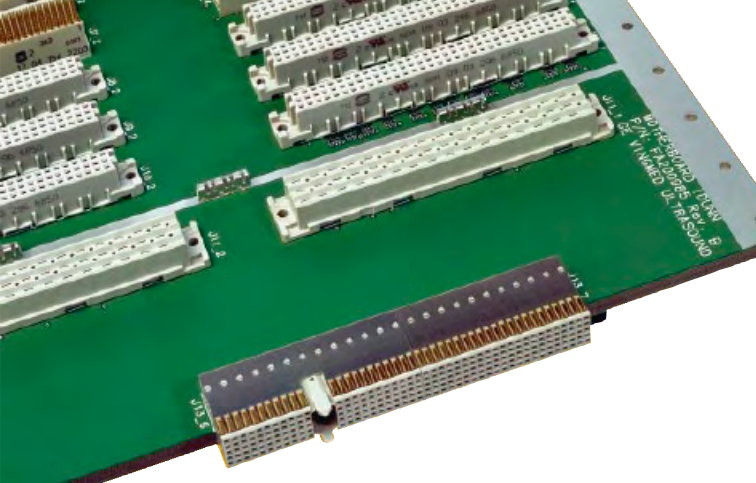


HARTING Integrated Solutions

HARTING Integrated Solutions (HIS) is the backplane and backplane systems assembly business unit for the HARTING Technology Group.

Manufacturing on 3 Continents, Europe, Asia and North America, based on a 'Global Footprint' of common equipment, tooling and procedures and providing a world-wide service to our customers.


Backplane design, signal integrity services:

Standard and customized backplane design/layout
Simulation and modeling
Measurement and verification



Manufacturing:

Focused on backplane assembly, prototypes to volume production
Assembly standards to IPC610 'J' Standard



- All assembly to the highest level, Class III
- Continuous training with in-house trainers
- SMT – press-in – wave solder
- Ability to handle large, high layer-count PCB's
- Fast prototype service
- Vertical integration
 - Full integration services
 - Cardframes, cabinets

Test:

All products tested – State-of-the-art robotic backplane testers including optical inspection
System functional and safety testing

Sales Network – worldwide

Albania

see Eastern Europe

Argentina

see Brazil

Armenia

see Eastern Europe

Australia

HARTING Pty Ltd
Suite 11 / 2 Enterprise Drive
Bundoora 3083, AUS-Victoria
Phone +61 3 9466 7088, Fax +61 3 9466 7099
au@HARTING.com, www.HARTING.com.au

Austria

HARTING Ges.m.b.H.
Deutschstraße 19, A-1230 Wien
Phone +43 1 6162121, Fax +43 1 6162121-21
at@HARTING.com, www.HARTING.at

Azerbaijan

see Eastern Europe

Bahrain

see United Arab Emirates

Belarus

see Eastern Europe

Belgium

HARTING N.V./S.A.
Z.3 Doornveld 23, B-1731 Zellik
Phone +32 2 466 0190, Fax +32 2 466 7855
be@HARTING.com, www.HARTING.be

Bosnia and Herzegovina

see Eastern Europe

Brazil

HARTING Ltda.
Rua Major Paladino 128 – Prédio 11
CEP 05307-000 – São Paulo – SP – Brasil
Phone +55 11 5035 0073, Fax +55 11 5034 4743
br@HARTING.com, www.HARTING.com.br

Brunei

see Singapore

Bulgaria

see Eastern Europe

Canada

see USA

China

Zhuhai HARTING Limited
Shanghai branch
Room 5403, HK New World Tower
300 Huai Hai Road (M.), Luwan District,
Shanghai 200021, China
Phone +86 21 6386 2200, Fax +86 21 6386 8636
cn@HARTING.com, www.HARTING.com.cn

Croatia

see Eastern Europe

Czech Republic

HARTING s.r.o.
Mlýnská 2, CZ-160 00 Praha 6
Phone +420 220 380 460, Fax +420 220 380 461
cz@HARTING.com, www.HARTING.cz

Denmark

HARTING ApS
Hjulgagervej 4a, DK-7100 Vejle
Phone +45 70 25 00 32, Fax +45 75 80 64 99
dk@HARTING.com, www.HARTING.com

Eastern Europe

HARTING Eastern Europe GmbH
Bamberger Straße 7, D-01187 Dresden
Phone +49 351 4361 760, Fax +49 351 436 1770
Eastern.Europe@HARTING.com
www.HARTING.com

Estonia

see Eastern Europe

Finland

HARTING Oy
Teknobulevardi 3-5, FI-01530 Vantaa
Phone +358 207 291 510, Fax +358 207 291 511
fi@HARTING.com, www.HARTING.fi

France

HARTING France
181 avenue des Nations, Paris Nord 2
BP 66058 Tremblay en France
F-95972 Roissy Charles de Gaulle Cédex
Phone +33 1 4938 3400, Fax +33 1 4863 2306
fr@HARTING.com, www.HARTING.fr

Germany

HARTING Deutschland GmbH & Co. KG
P.O. Box 2451, D-32381 Minden
Simeonscarre 1, D-32427 Minden
Phone +49 571 8896 0, Fax +49 571 8896 282
de@HARTING.com, www.HARTING-Deutschland.de

Georgia

see Eastern Europe

Great Britain

HARTING Ltd., Caswell Road
Brackmills Industrial Estate
GB-Northampton, NN4 7PW
Phone +44 1604 827 500, Fax +44 1604 706 777
gb@HARTING.com, www.HARTING.co.uk

Hong Kong

HARTING (HK) Limited
Regional Office Asia Pacific
3512 Metroplaza Tower 1, 223 Hing Fong Road
Kwai Fong, N. T., Hong Kong
Phone +852 2423 7338, Fax +852 2480 4378
ap@HARTING.com, www.HARTING.com.hk

Hungary

HARTING Magyarország Kft.
Fehérvári út 89-95, H-1119 Budapest
Phone +36 1 205 34 64, Fax +36 1 205 34 65
hu@HARTING.com, www.HARTING.hu

India

HARTING India Private Limited
No. D, 4th Floor, 'Doshi Towers'
No. 156 Poonamallee High Road
Kilpauk, Chennai 600 010, Tamil Nadu, India
Phone +91 44 435604 15 / 416
Fax +91 44 435604 17
in@HARTING.com, www.HARTING.in

Indonesia

see Malaysia

Island – Electric

Smith & Norland
Nóatún 4, IS – 105 Reykjavík
Phone +354 520 3000, Fax +354 520 3011
olaf@sminor.is, www.sminor.is

Israel

COMTEL
Israel Electronic Solutions Ltd.
Bet Hapamon, 20 Hataas st.
P.O.Box 66, Kefar-Saba 44425
Phone +972-9-7677240, Fax +972-9-7677243
sales@comtel.co.il, www.comtel.co.il

Italy

HARTING SpA
Via Dell' Industria 7, I-20090 Vimodrone (Milano)
Phone +39 02 250801, Fax +39 02 2650 597
it@HARTING.com, www.HARTING.it

Japan

HARTING K. K.
Yusen Shin-Yokohama 1 Chome Bldg., 2F
1-7-9, Shin-Yokohama, Kohoku
Yokohama 222-0033 Japan
Phone +81 45 476 3456, Fax +81 45 476 3466
jp@HARTING.com, www.HARTING.co.jp

Jordan

see United Arab Emirates

Kazakhstan

see Eastern Europe

Kirghizia

see Eastern Europe

Korea (South)

HARTING Korea Limited
#308 Yatap Leaders Building, 342-1
Yatap-dong, Bundang-gu, Sungnam-City, Kyunggi-do
463-828, Republic of Korea
Phone +82 31 781 4615, Fax +82 31 781 4616
kr@HARTING.com, www.HARTING.kr

Kosovo

see Eastern Europe

Latvia

see Eastern Europe

Lithuania

see Eastern Europe

Macedonia

see Eastern Europe

Malaysia (Office)

HARTING Singapore Pte Ltd, Malaysia Branch
11-02 Menara Amcorp, Jln. Persiaran Barat
46200 PJ, Sel. D. E., Malaysia
Phone +60 3 / 7955 6173, Fax +60 3 / 7955 5126
sg@HARTING.com

Montenegro

see Eastern Europe

Netherlands

HARTING B.V.
Larenweg 44, NL-5234 KA 's-Hertogenbosch
Postbus 3526, NL-5203 DM 's-Hertogenbosch
Phone +31 736 410 404, Fax +31 736 440 699
nl@HARTING.com, www.HARTINGbv.nl

New Zealand

see Australia

Norway

HARTING A/S
Østensjøveien 36, N-0667 Oslo
Phone +47 22 700 555, Fax +47 22 700 570
no@HARTING.com, www.HARTING.no

Pakistan

see United Arab Emirates

Philippines

see Malaysia

Poland

HARTING Polska Sp. z o. o.
ul. Kamieńskiego 201-219, PL-51-126 Wrocław
Phone +48 71 352 81 71, Fax +48 71 320 74 44
pl@HARTING.com, www.HARTING.pl

Portugal

HARTING Iberia, S. A.
Avda. Josep Tarradellas 20-30, 4º 6ª
E-08029 Barcelona
Phone +351 219 673 177, Fax +351 219 678 457
es@HARTING.com, www.HARTING.es/pt

Qatar

see United Arab Emirates

Republic of Moldova

see Eastern Europe

Romania

HARTING Romania SCS
Europa Unita str. 21, 550018-Sibiu, Romania
Phone +40 369-102 671, Fax +40 369-102 622
ro@HARTING.com, www.HARTING.com

Russia

HARTING ZAO
Maliy Sampsoniyevsky prospect 2A
194044 Saint Petersburg, Russia
Phone +7 812 327 6477, Fax +7 812 327 6478
ru@HARTING.com, www.HARTING.ru

Saudi Arabia

see United Arab Emirates

Serbia

see Eastern Europe

Singapore

HARTING Singapore Pte Ltd.
25 International Business Park
#02-06 German Centre, Singapore 609916
Phone +65 6225 5285, Fax +65 6225 9947
sg@HARTING.com, www.HARTING.sg

Slovakia

HARTING s.r.o.
Sales office Slovakia
Povázská 2, SK – 940 67 Nové Zámky
Phone +421 356-493 993, Fax +421 356-402 114
sk@HARTING.com, www.HARTING.sk

Slovenia

see Eastern Europe

South Africa – Electric

HellermannTyton Pty Ltd.
Private Bag X158 Rivonia 2128
34 Milky Way Avenue
Linbro Business Park 2065, Johannesburg
Phone +27(0)11879-6600, Fax +27(0)11879-6606
sales.jhb@hellermann.co.za

South Africa – Electronics

Cabcon Technologies (PTY) Ltd
P.O. Box 13002, Northmead, 1511
Phone +27 1184533258, Fax +27 118454077
cabcon@mweb.co.za

Spain

HARTING Iberia S.A.
Avda. Josep Tarradellas 20-30 4º 6ª
E-08029 Barcelona
Phone +34 93 363 84 75, Fax +34 93 419 95 85
es@HARTING.com, www.HARTING.es

Sweden

HARTING AB
Gustavslundsvägen 141 B 4tr, S-167 51 Bromma
Phone +46 8 445 7171, Fax +46 8 445 7170
se@HARTING.com, www.HARTING.se

Switzerland

HARTING AG
Industriestrasse 26, CH-8604 Volketswil
Phone +41 44 908 20 60, Fax +41 44 908 20 69
ch@HARTING.com, www.HARTING.ch

Taiwan

HARTING R.O.C. Limited
Room 1, 5/F, 495 GuangFu South Road
RC-110 Taipei, Taiwan
Phone +886 2 2758 6177, Fax +886 2 2758 7177
tw@HARTING.com, www.HARTING.com.tw

Tajikistan

see Eastern Europe

Thailand

see Malaysia

Turkey

HARTING TURKEI Elektronik Ltd. Şti.
Barbaros Mah. Dereboyu Cad. Fesleğin Sok.
Uphill Towers, A-1b Kat:8 D:45
34746 Ataşehir, İstanbul
Phone +90 216 688 81 00, Fax +90 216 688 81 01
tr@HARTING.com, www.HARTING.com.tr

Turkmenistan

see Eastern Europe

United Arab Emirates

Eurotech Fzc
Office Bldg-36, Office No. G36-02, P.O. Box 49602
Hamriyah Free Zone, Sharjah
Phone +971 6 5262077, Fax +971 6 5262117
sales@eurotech.ae, www.eurotech.ae

Ukraine

see Eastern Europe

USA

HARTING Inc. of North America
1370 Bowes Road, USA-Elgin, Illinois 60123
Phone +1 (877) 741-1500 (toll free)
Fax +1 (866) 278-0307 (Inside Sales)
us@HARTING.com, www.HARTING-USA.com

Uzbekistan

see Eastern Europe

Distributors – worldwide

Farnell: www.farnell.com

RS Components: www.rs-components.com

FUTURE Electronics: www.futureelectronics.com

Other countries and general contact

HARTING Electric GmbH & Co. KG
P.O. Box 1473, D-32328 Espelkamp
Phone +49 5772 47-97100
Fax +49 5772 47-495
electric@HARTING.com

HARTING Electronics GmbH & Co. KG
P.O. Box 1433, D-32328 Espelkamp
Phone +495772/47-97200
Fax +495772/47-777
electronics@HARTING.com



Pushing Performance

www.HARTING.com